

Ishida NOVA-II Price-Computing Scale



Approvals



PART #	MODEL	CAPACITY	GRADUATION
46555NOVA-II-15 lb	15 lb/6 kg	0.005 lb/0.002 kg
41465NOVA-II-30 lb	30 lb/15 kg ..	0.01 lb/0.005 kg
46554NOVA-II-60 lb	60 lb/30 kg ..	0.02 lb/0.01 kg
46556NOVA-II-30 lb w/pole...	30 lb/15 kg ..	0.01 lb/0.005 kg
46557NOVA-II-60 lb w/pole...	60 lb/30 kg ..	0.02 lb/0.01 kg

The Ishida NOVA-II retail scale provides 1/3000 accuracy for high precision performance. NTEP certified, this versatile scale offers an operator display as well as a convenient customer display. The compact design maximizes work space and advanced function keys simplify calculations.

Easy to use, the NOVA-II provides one-touch zero adjustment and tare selection. The "save" key stores tare and unit prices until new values are entered. Convenient preset keys store up to 15 unit prices or tares.

Applications

- Point-of-sale weighing and price computing

Standard Features

- Advanced computing functions
- Compact design
- Customer display on rear of unit
- High accuracy
- Platform dimensions: 9.6" x 13.8" (244mm x 330mm)
- Computes customer's change

Options/Accessories

- 45355220/240 VAC power supply (transformer)
- 47976Fish platter
- 47977Produce platter
- 48727Additional operating manual
- 48728Service manual

ACCURACY:

1/3000

DISPLAY:

VFD, 0.453" (11.5mm) character height

DISPLAY ITEMS:

Weight: 5 digits

Unit price: 5 digits

Total price: 6 digits

WEIGHT:

Without pole display: 14.3 lb (6.5 kg)

With pole display: 15.9 lb (7.2 kg)

PRESET KEY:

Stores up to 15 unit prices or tare weights

POWER SOURCE:

115/230V ±10%, 50/60Hz

POWER CONSUMPTION:

5 W (115 VAC)

6 W (230 VAC)

OPERATING TEMPERATURE:

23° to 104°F (-5° to 40°C)

WARRANTY:

1-year limited warranty

CLASSIFICATION:

NTEP certified, CC# 98-001, UL listed

DIMENSIONS

Without pole display

A: 14.1" (357mm) D: 4.5" (115mm)

B: 14.2" (360mm) E: 9.8" (248mm)

C: 13.8" (350mm)

With pole display


A: 14.1" (357mm) F: 16.9" (429mm)

B: 15.4" (390mm) G: 13.8" (350mm)


C: 14.2" (360mm) H: 4.5" (115mm)

D: 9.8" (250mm) I: 9.8" (248mm)

E: 2.7" (70mm)

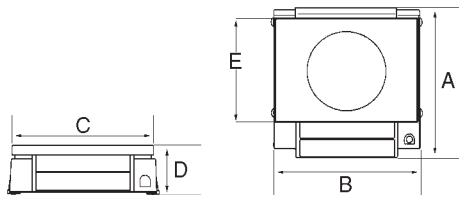

Without pole display

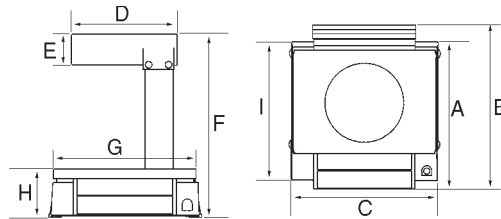

With pole display